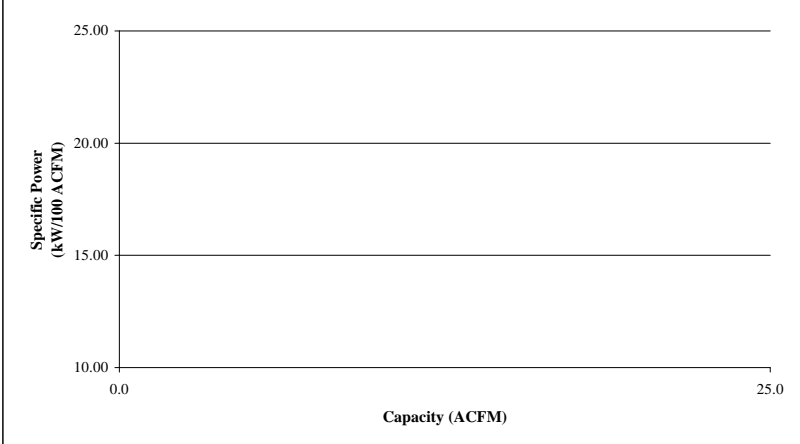


## COMPRESSOR DATA SHEET

### Rotary Screw Variable Frequency Drive Compressor

#### MODEL DATA - FOR COMPRESSED AIR

1	Manufacturer:		
2	Model Number:		Date:
	<input type="checkbox"/> Air-cooled <input type="checkbox"/> Water-cooled <input type="checkbox"/> Oil-injected <input type="checkbox"/> Oil-free	# of Stages:	
3	Full Load Operating Pressure		psig <sup>b</sup>
4	Maximum Full Flow Operating Pressure		psig <sup>c</sup>
5	Drive Motor Nameplate Rating		hp
6	Drive Motor Nameplate Efficiency		percent
7	Fan Motor Nameplate Rating (if applicable)		hp
8	Fan Motor Nameplate Efficiency		percent
9	Input Power (kW)	Capacity (acfm) <sup>a,e</sup>	Specific Power (kW/100 acfm) <sup>e</sup>
			#DIV/0!
			#DIV/0!
			#DIV/0!
			#DIV/0!
			#DIV/0!
10	Total Package Input Power at Zero Flow <sup>d</sup>	0.0	kW
11	 <p style="text-align: center; font-size: small;">Note: Graph is only a visual representation of the data in Section 9</p>		

NOTES:

**Member:**



- a. Measured at the discharge terminal point of the compressor package in accordance with Annex E to ISO 1217; acfm is actual cubic feet per minute at inlet conditions.
- b. The operating pressure at which the Capacity and Electrical Consumption were measured for this data sheet.
- c. Maximum pressure attainable at full flow, usually the unload pressure setting for load/no load control or the maximum pressure attainable before capacity control begins. May require additional power.
- d. No Load Power. In accordance with ISO 1217, Annex E, if measurement of no load power equals less than 1%, manufacturer may state "not significant" or "0" on the test report.
- e. Tolerance is specified in Annex E to ISO 1217 as follows:  
 NOTE: The terms "power" and "energy" are synonymous for purposes of this document.

Volume Flow Rate at specified conditions		Volume Flow Rate	Specific Energy
$\text{m}^3 / \text{min}$	$\text{ft}^3 / \text{min}$	%	%
Below 0.5	Below 15	+/- 7	+/- 8
0.5 to 1.5	15 to 50	+/- 6	+/- 7
1.5 to 15	50 to 500	+/- 5	+/- 6
Above 15	Above 500	+/- 4	+/- 5